



CORNISH CONCRETE PRODUCTS LTD

LOADING BAYS



Precast Loading Bay surrounds are manufactured and designed to meet client's requirements, and combine high quality finish and accuracy with speed of erection and all the advantages to the contract programme.

Compared to insitu surrounds, they combine high quality finish and accuracy with speed of erection and all the advantages that this brings to the contract programme.


Dock leveller components are as follows:

Front Elevation "Tee" Piece Walls, Rear Retaining Walls, End Return Retaining Walls,

Bridge Deck Slabs, External Yard Retaining Walls, Thermomass Insulated Wall Panels.

Benefits:

- No shuttering or pouring or curing of concrete on site.
- Provides exact costings for building contractors and developers.
- Suitable for rapid/multi installations and 'fast track' construction programmes.
- Not reliant on weather conditions.
- A range of special finishes is available.
- Construction is carried out in factory conditions thus guaranteeing consistent quality.

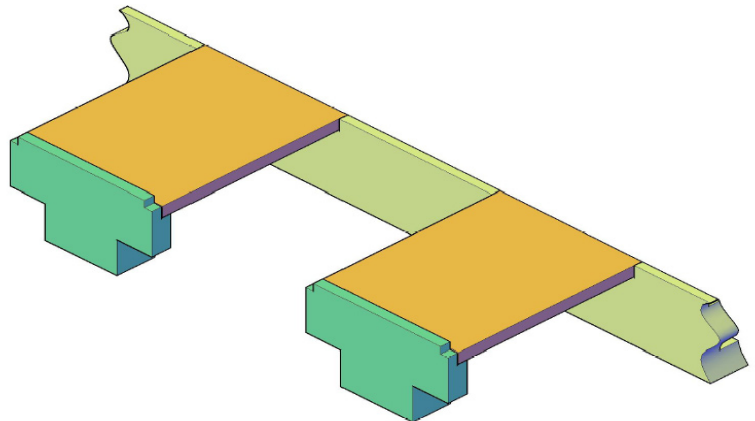

POINT MILLS • BISSOE • TRURO • CORNWALL TR4 8QZ

TELEPHONE: 01872•864808 FAX: 01872•863606

e-mail: info@cornishconcrete.co.uk website: www.cornishconcrete.co.uk



(Status: ISO 9001: 2000)